


## Installation Manual For 240.1280

### Deck Diverter Trim With Hand Shower

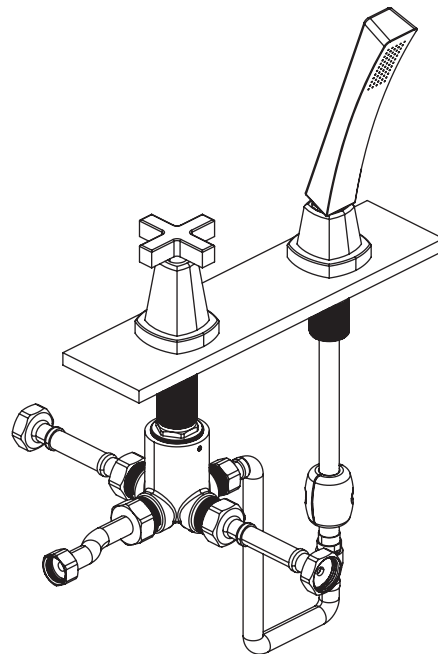

*\* Deck Diverter Valve Sold Separately*

#### NOTICE TO HOMEOWNER

- We recommend that this product is installed by a qualified professional plumber.
- Please check this product immediately to ensure that it has not been damaged and is complete. Before installation, please make sure this product is the correct model and you have all the parts required for installation and use.
- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the product.
- Turn off water supply before commencing work.
- Please read these instructions carefully and retain for future reference.

#### BEFORE YOU BEGIN

- You must observe all local plumbing laws and codes.
- Do not install this valve if it does not meet local plumbing codes.
- Shut off the main water supply.

# Installation Manual For 240.1280

## Deck Diverter Trim With Hand Shower

TABLE OF CONTENTS	
• OPERATING SPECIFICATIONS . . . . .	1
• INSTALLING THE HAND HELD & HOSES . . . . .	2
• INSTALLING THE DECK DIVERTER AND TRIM . . . . .	3
• HOSE INSTALLATION . . . . .	7
• CARTRIDGE REPLACEMENT . . . . .	7

## OPERATING SPECIFICATIONS

### WATER TEMPERATURE



This product is to be used with water at a temperature range of 40°F - 120°F ONLY!

### WATER PRESSURE




This product is to be used with a water pressure range of 15 PSI to 80 PSI ONLY


If water pressure is greater than 80 PSI install a pressure reducing valve (PRV)

This valve meets or exceeds ANSI A112.18.1 and ASSE 1016

## INSTALLING THE HAND HELD & HOSE

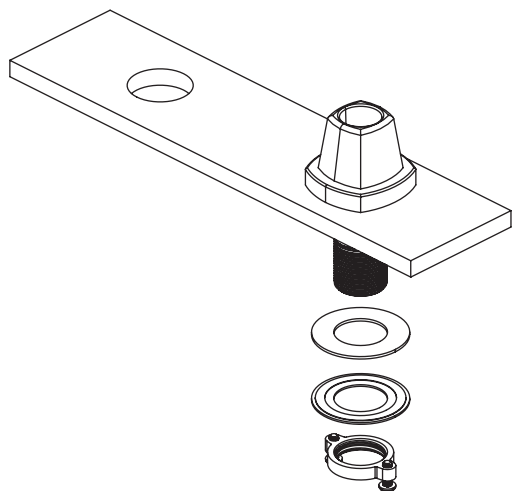


Insert nut and washers and tighten to secure Hand Shower Holder.

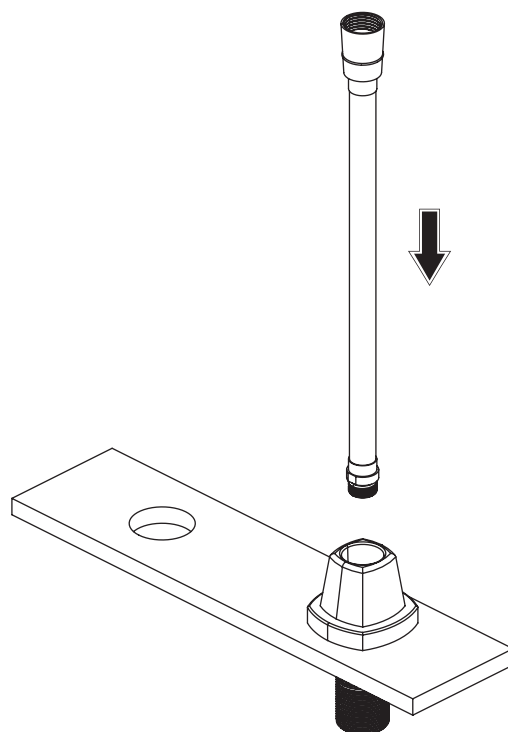


Insert hose through the hand shower holder.

## INSTALLING THE HAND HELD & HOSE

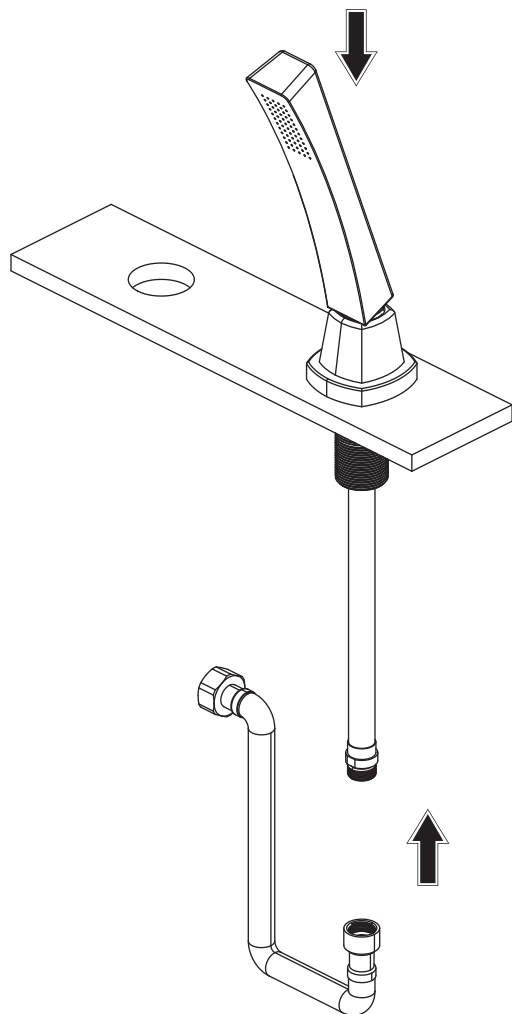


Attach second hose and hand held.

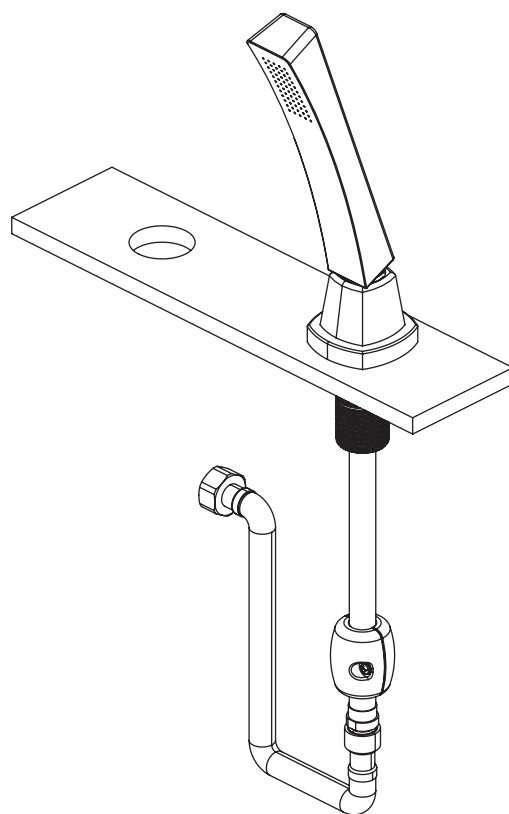


Attached hose weight (optional)

## INSTALLING THE DECK DIVERTER AND TRIM

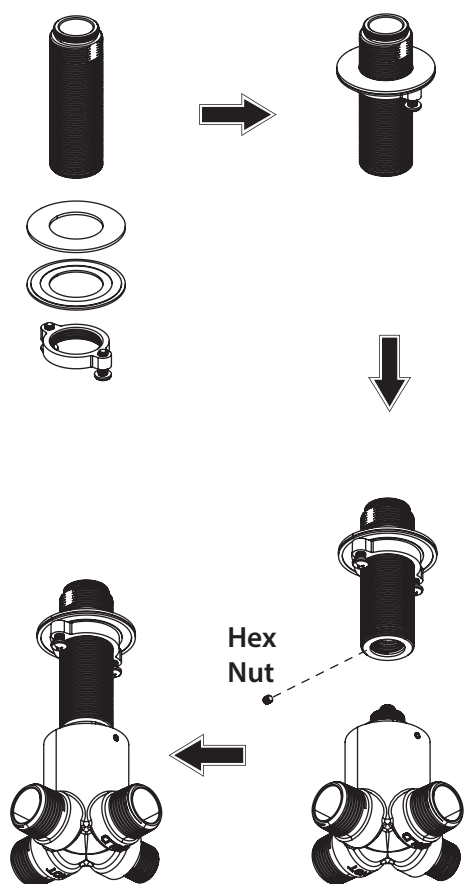


Assemble threaded connector as seen below and tighten hex nut. DKM.2420 valve sold separately.

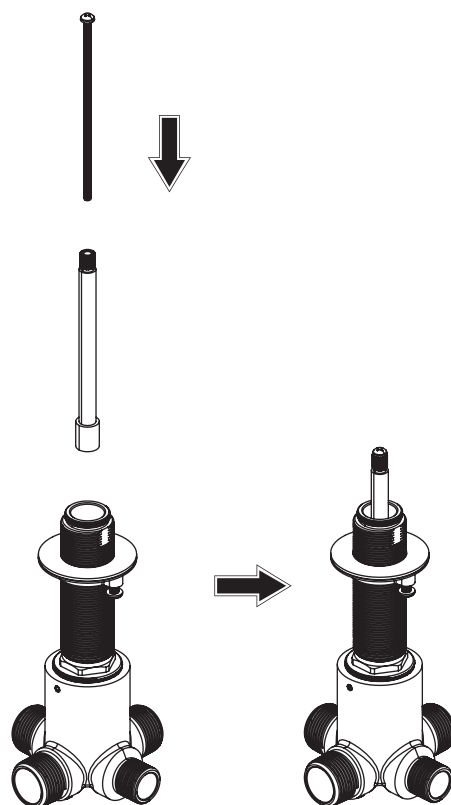


insert extender and tighten screw. The deck diverter is now ready to install onto the deck.

## INSTALLING THE DECK DIVERTER AND TRIM

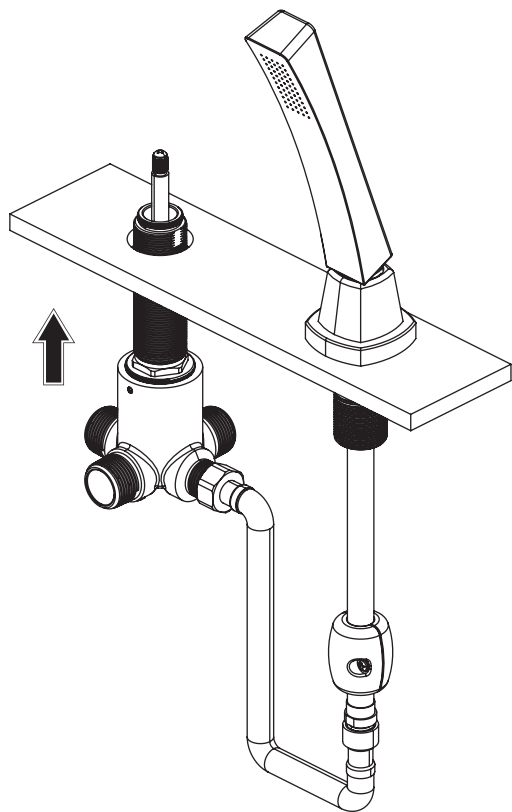


Insert assembled deck diverter through deck hole. Tighten hand shower hose onto deck diverter valve

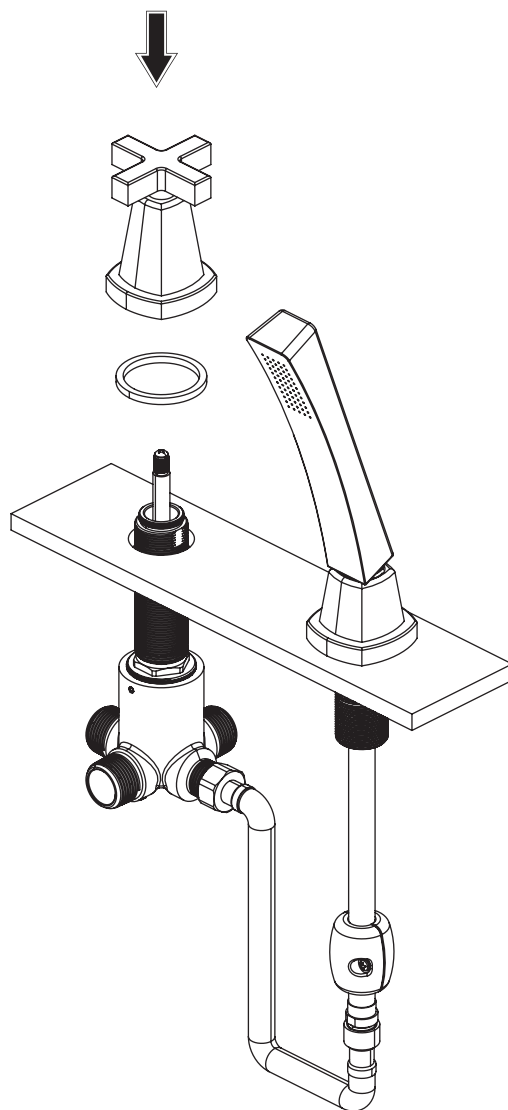

Twist and insert handle base onto assembled deck diverter.



## INSTALLING THE DECK DIVERTER AND TRIM

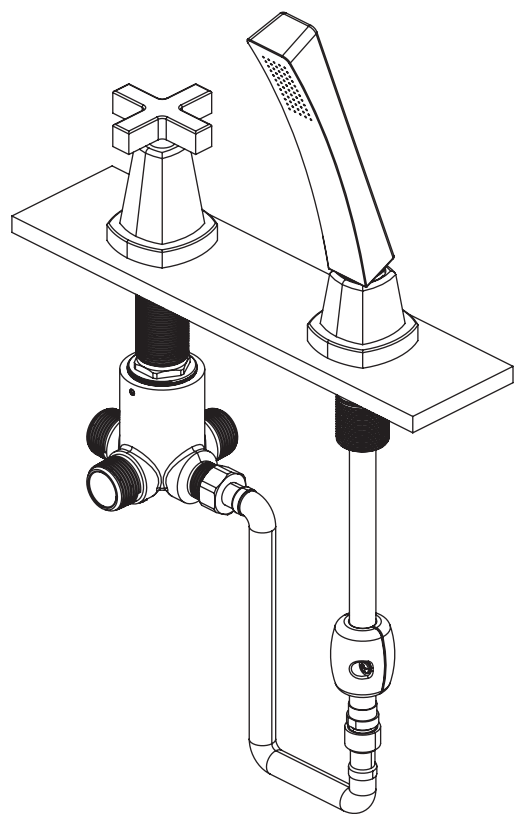

Completely Installed handle set is seen here.





## HOSE INSTALLATION

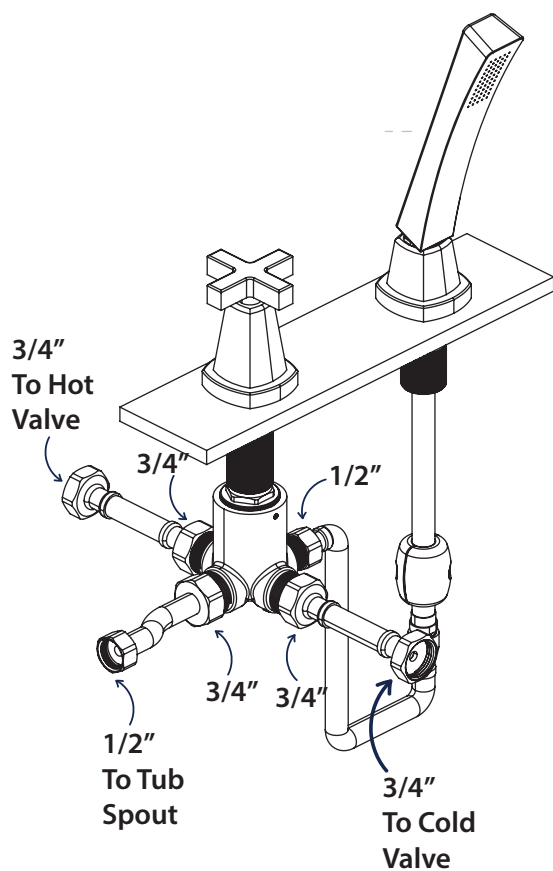

Attach & tighten hoses as seen above.

## CARTRIDGE REPLACEMENT

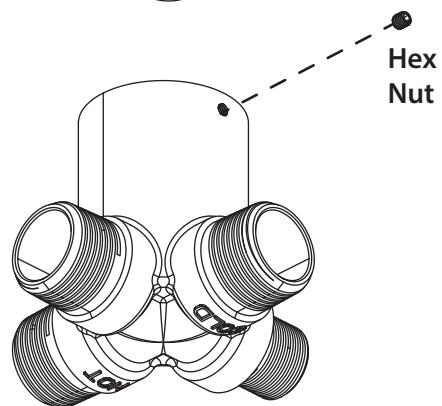

Loosen and remove hex nut to and retaining nut to remove cartridge.