


160.1168 | Floor Mounted Tub Filler With Hand Held Shower

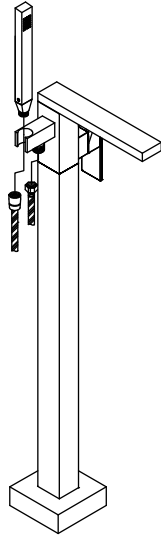

SPECIFICATIONS:

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 1.8 GPM @ 60 PSI
- Diverter knob controls water flow between spout and hand held
- 7.0 GPM Spout Flow Rate.
- Includes anti-scald ring located on cartridge.

STANDARDS:

- ASME A112.18.1 / CSA B125.1

Legislation Compliance



ZeroDrip Technology



Technical Diagram

