


196.1165 | Floor Mounted Tub Filler With Hand Held Shower

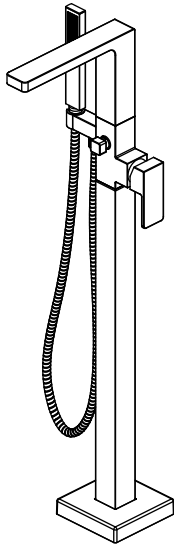

SPECIFICATIONS:

- Solid Brass construction
- Floor Mount Installation
- Hand Shower Flow Rate = 1.8 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.5 GPM Spout Flow Rate @ 60PSI.
- Includes anti-scald ring located on cartridge

STANDARDS:

- ASME A112.18.1 / CSA B125.1

Technical Diagram

