


260.1165 | Floor Mounted Tub Filler With Hand Held Shower

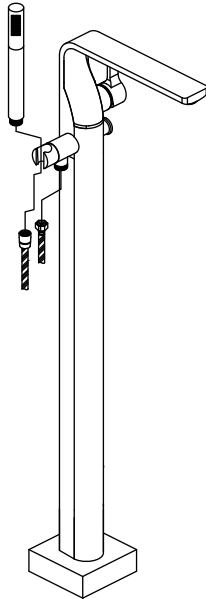

SPECIFICATIONS:

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 1.8 GPM @ 60 PSI
- Diverter knob controls water flow between spout and hand held
- 8.0 GPM Spout Flow Rate
- Ceramic Disc Cartridge Allows Both Volume and Temperature Control
- Includes anti-scald ring located on cartridge

STANDARDS:

- ASME A112.18.1 / CSA B125.1

Technical Diagram

