


## 145.3050 | Single Output Shower W/ Shower Head & Arm



### COMPONENTS

- HS1030 - 7" Shower Arm
- HSB.6R - 6" Shower Head
- 145.2200T - Shower Trim
- PBV.1005AS - Shower Valve

### SHOWER VALVE:

- Pressure balance shower valve
- Valve includes service stops
- Lift handle to control volume
- Turn left for hot, right for cold

### SHOWER HEAD:

- Single function
- Solid brass construction
- 1.8 GPM flow rate

### STANDARDS:

- ASME A112.18.1 / CSA B125.1


See individual component specification sheets on following pages for further details.

HS1030 | Round Shower Arm




SPECIFICATIONS:

- Solid Brass Shower Arm
- With Brass Flange

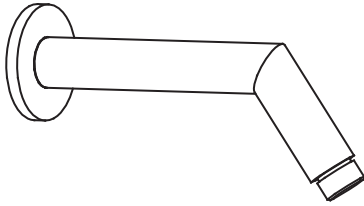

Technical Diagram

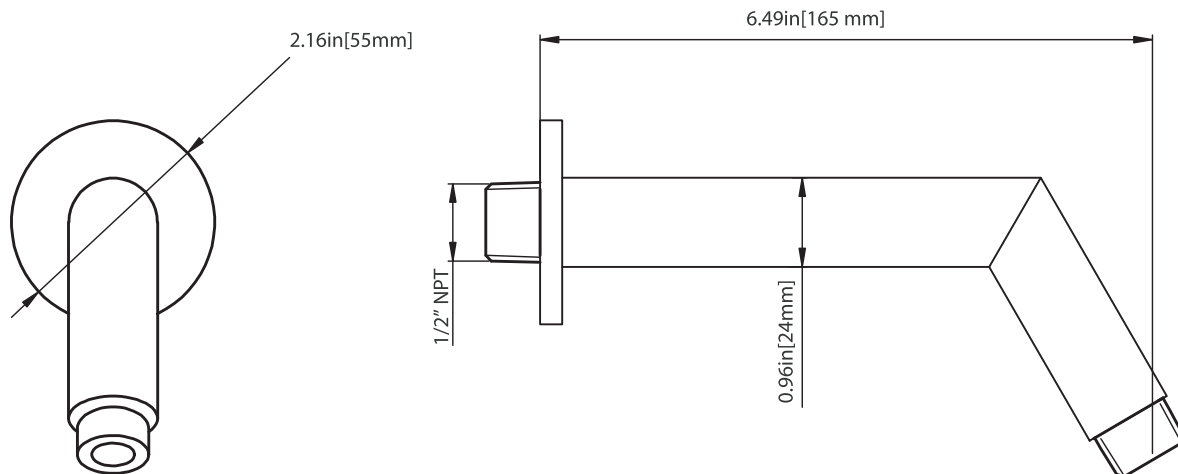


## HSB.6R | 6" Brass Shower Head




### SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate
- 123 Nozzles

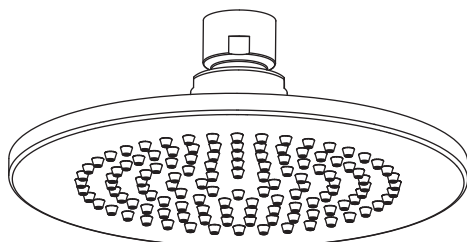

### Technical Diagram

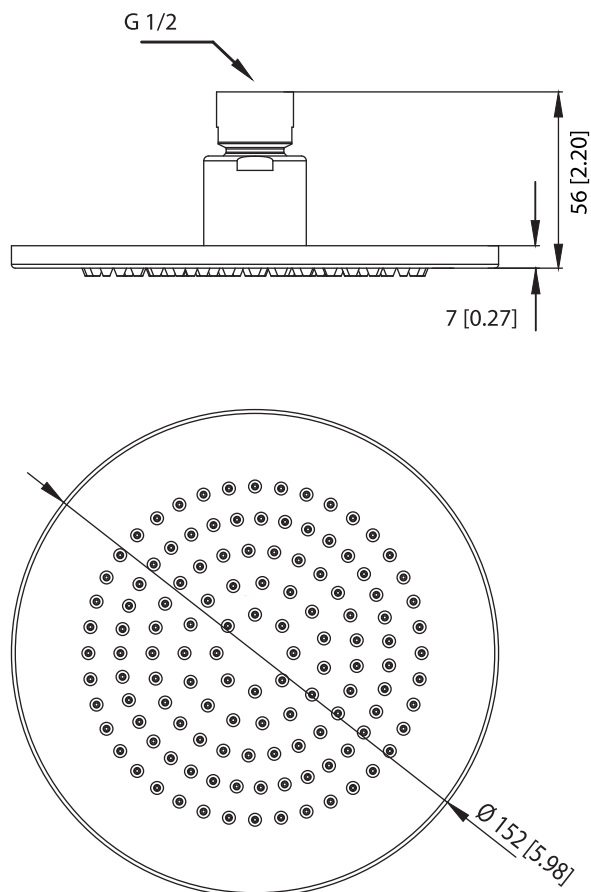


## 145.2200T | Shower Trim



### SPECIFICATIONS:

- Solid Brass Trim & Handle set
- Valve not included - trim only
- Lift Handle to control volume. Turn left for hot, right for cold.

### Technical Diagram

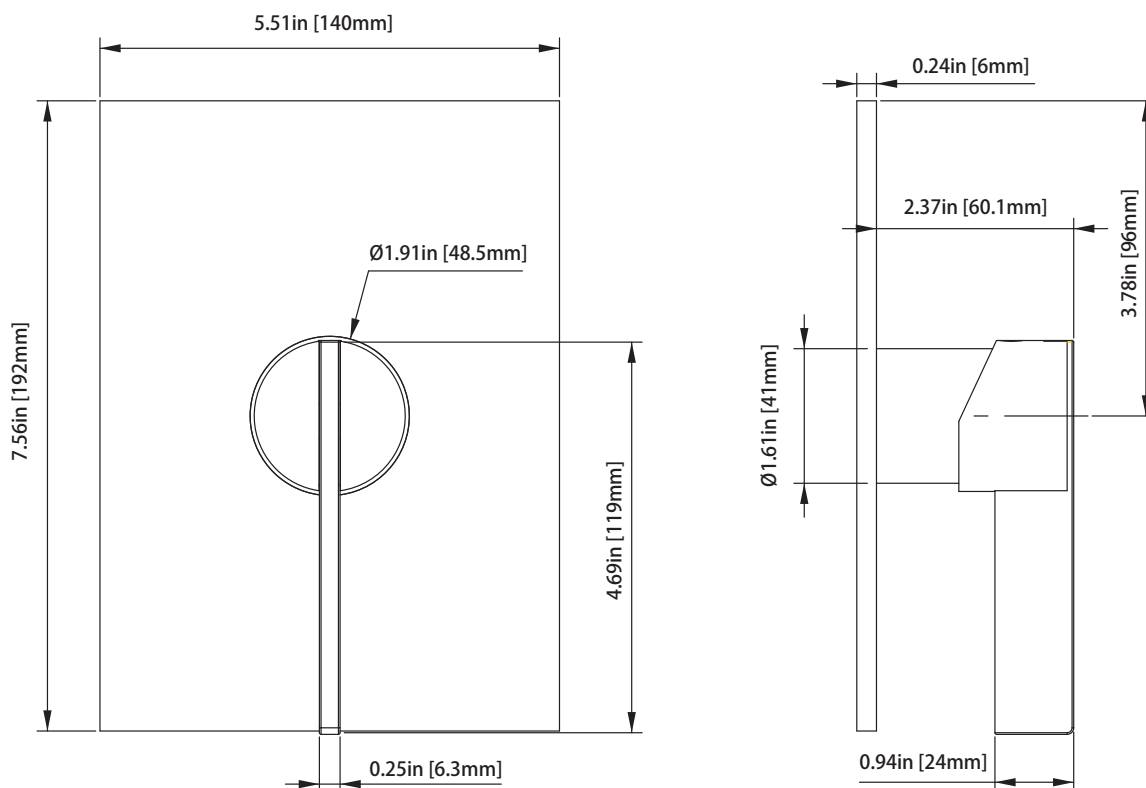

**PBV1005AS | Single Control Pressure Balance Valve** Page 1 of 2




**SPECIFICATIONS:**







- Lift Handle to control volume. Turn left for hot, right for cold.
- Pressure Balance Valve Flow Rate - 5.5 GPM @ 60 PSI
- Extension Available - PBV.E185\*\*

**STANDARDS:**

- ASME A112.18.1 / CSA B125.1

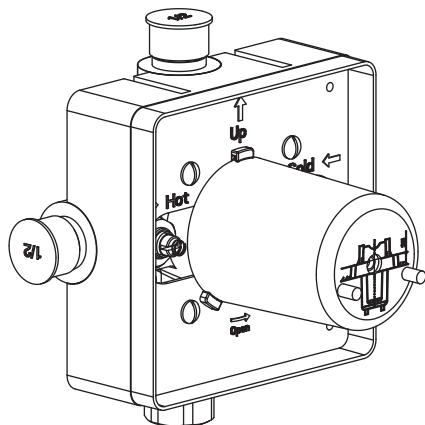

**Technical Diagram**



PBV1005AS | Single Control Pressure Balance Valve Page 2 of 2



**Water Flow Diagram**

