


## 160.3450 | Two Output Shower W/ Rain Head & Hand Held

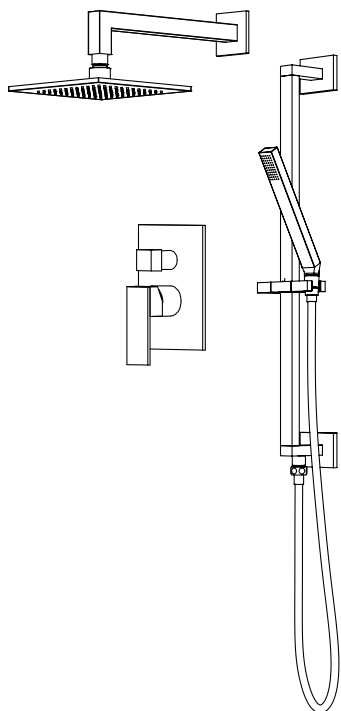

### COMPONENTS

- HS1001SA - 12" Shower Arm
- HS1001A - 8" Shower Head
- 160.2101T - Shower Trim
- PBV.1005A - Shower Valve
- HS1006H - Hand Held
- 160.601024A - Wall Elbow w/ Holder
- SP.150EM - 1.5m Hose

### SHOWER VALVE:

- Pressure balance shower valve
- Valve includes service stops
- Lift bottom handle to control volume
- Turn left for hot, right for cold
- Top handle controls water diversion
- 1/2" NPT

### SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

### HAND HELD:

- Solid Brass construction
- 1.8 GPM flow rate
- With back flow prevention check valve

### STANDARDS:


- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.


HS1001SA | Square Shower Arm - 300mm - 12"

SPECIFICATIONS:

- Solid Brass Shower Arm
- With Flange



Technical Diagram

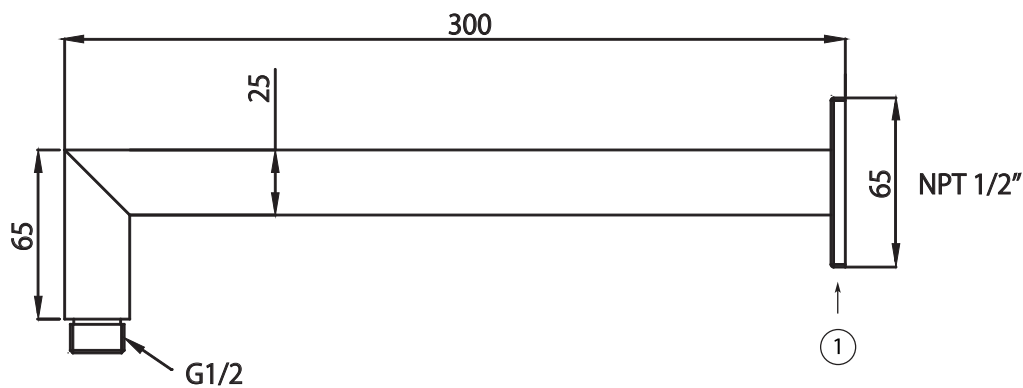


HS1001A | 8" Brass Shower Head




SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate

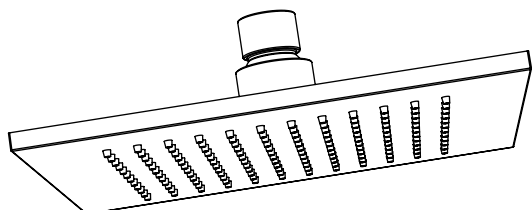

Technical Diagram

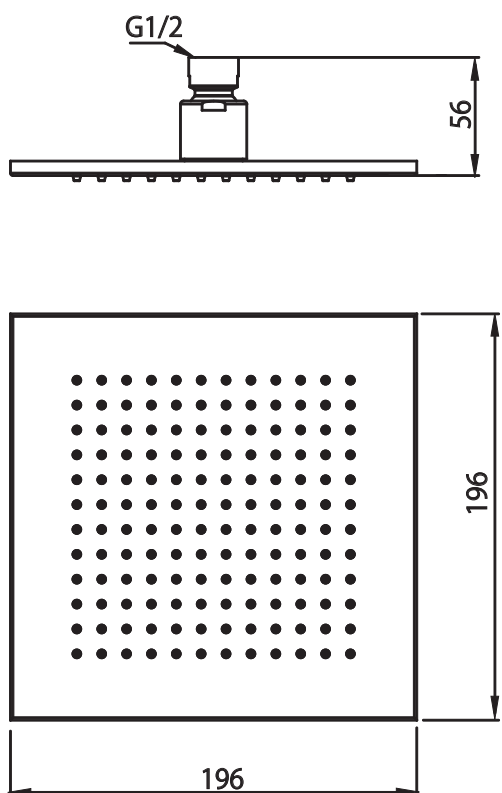


## 160.2101T | Tub / Shower Trim



### SPECIFICATIONS:

- Solid Brass Construction
- Valve not included - trim only
- Lift Handle to control volume. Turn left for hot, right for cold.
- Small knob controls 2-way water diversion

### Technical Diagram

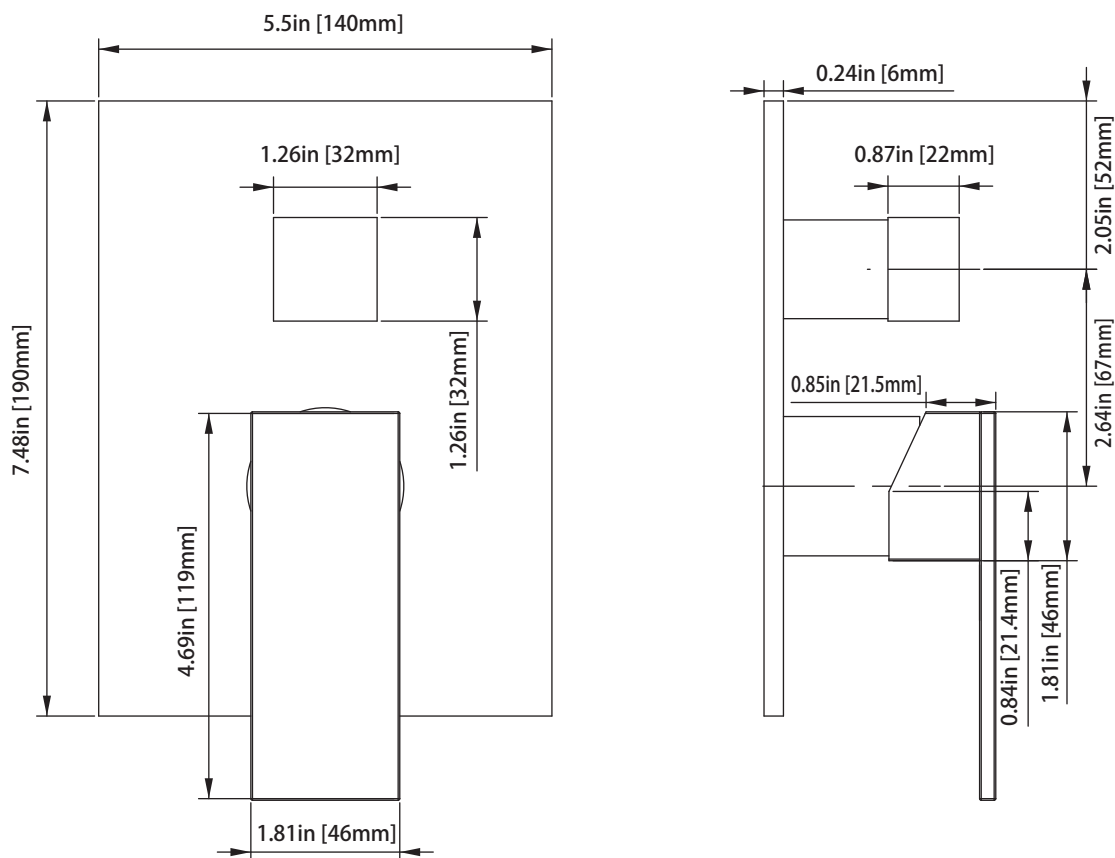

**PBV1005A | Pressure Balance Valve With Integrated 2-Way Diverter** Page 1 of 2




**SPECIFICATIONS:**







- Lift Handle to control volume. Turn left for hot, right for cold.
- Knob controls 2-way water diversion - shared output.
- Pressure Balance Valve Flow Rate - 5.5 GPM @ 60 PSI
- Extension Available - PBV.2100E\*\*

**STANDARDS:**

- ASME A112.18.1 / CSA B125.1

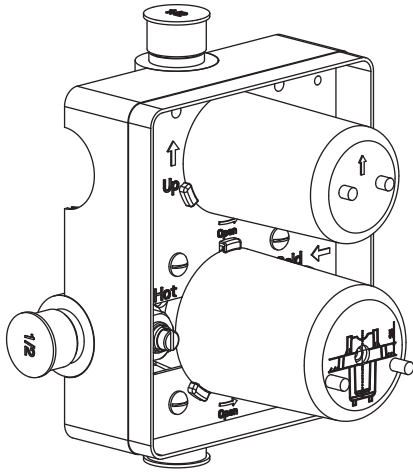


**Technical Diagram**

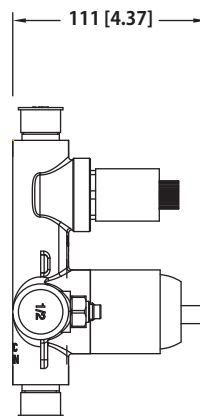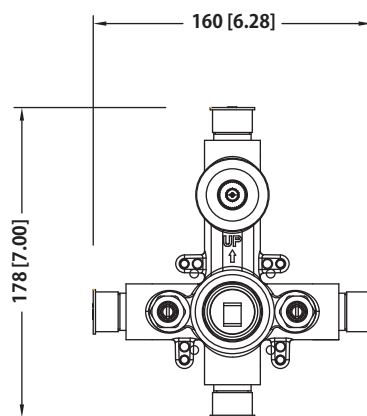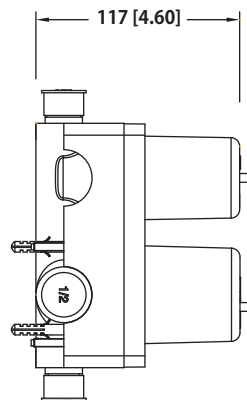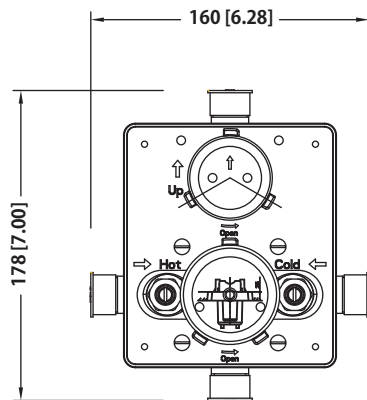

PBV1005A | Pressure Balance Valve With Integrated 2-Way Diverter Page 2 of 2




Water Diversion Diagram

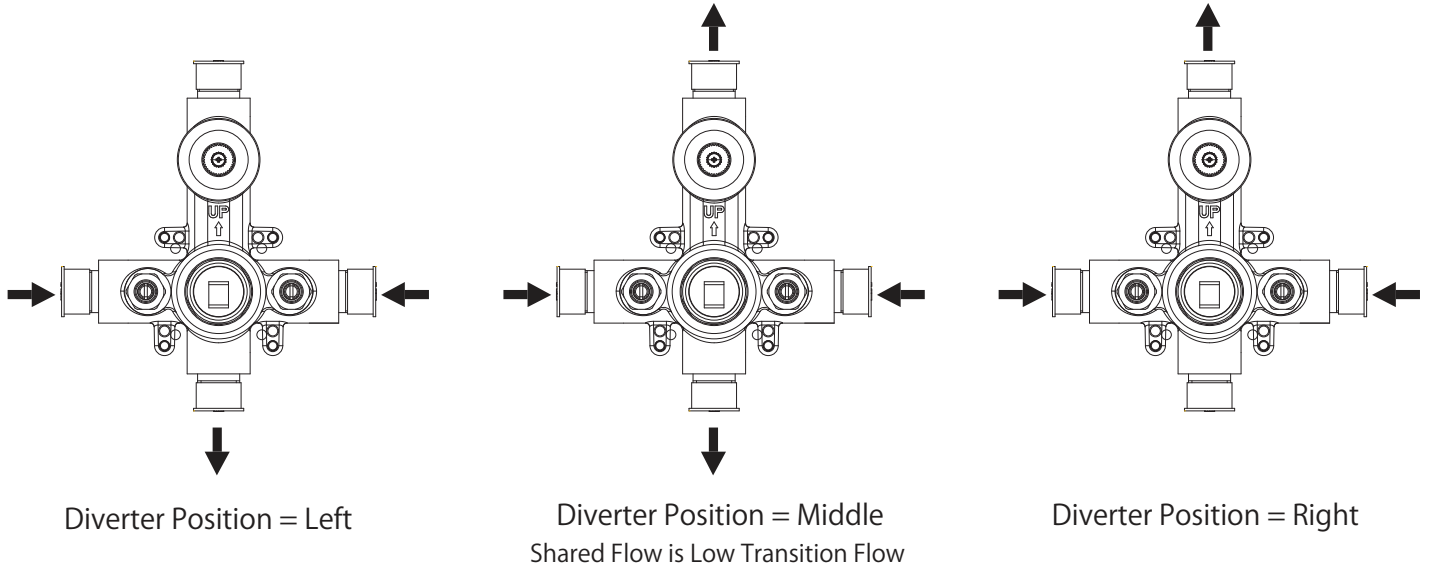


## HS1006H | Solid Brass Hand Shower

### SPECIFICATIONS:


- Solid Brass Construction
- 1.8 GPM Flow Rate
- With back flow prevention check valve

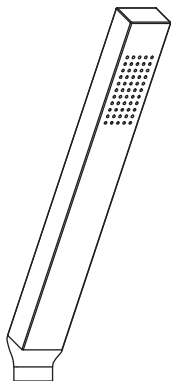

### Technical Diagram

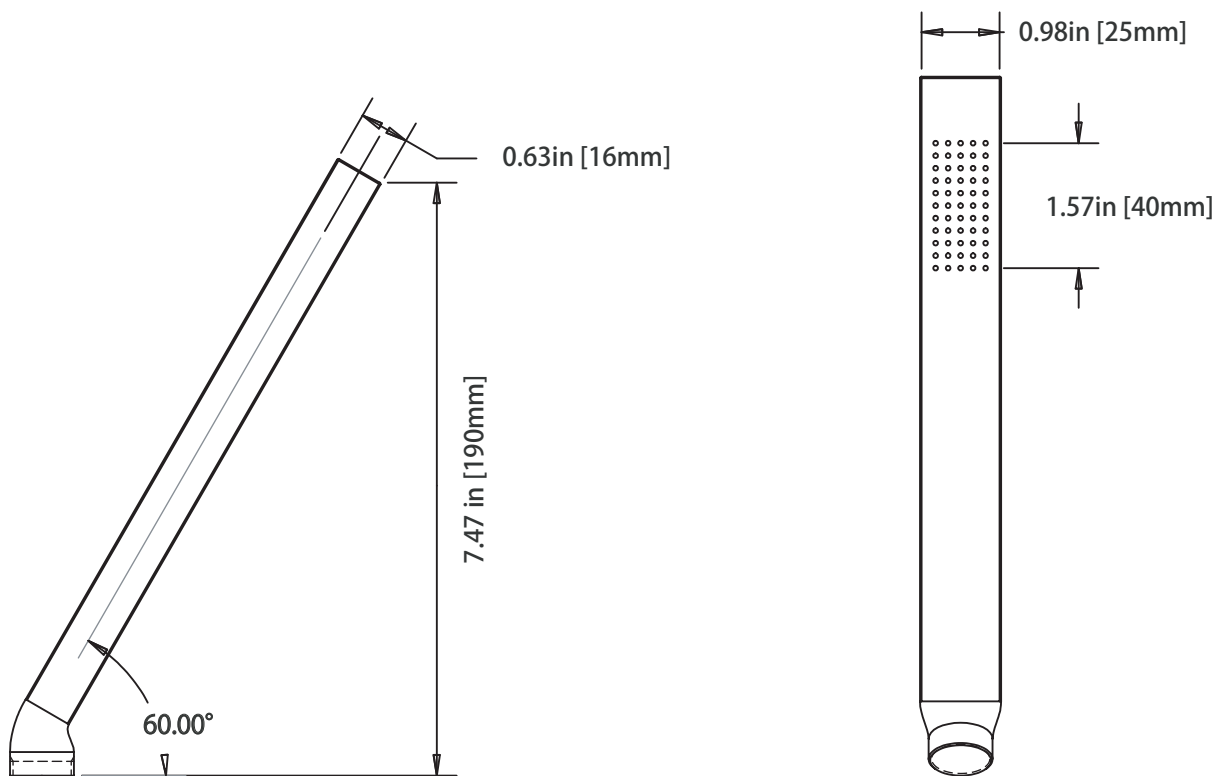


## 160.601024A | Slide Bar With Integrated Wall Elbow

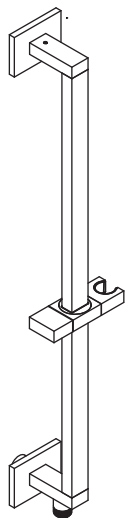

### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation
- Integrated wall elbow
- 1/2" female connection with adjustable slide on installation
- Includes check valve with back-flow prevention

### Technical Diagram

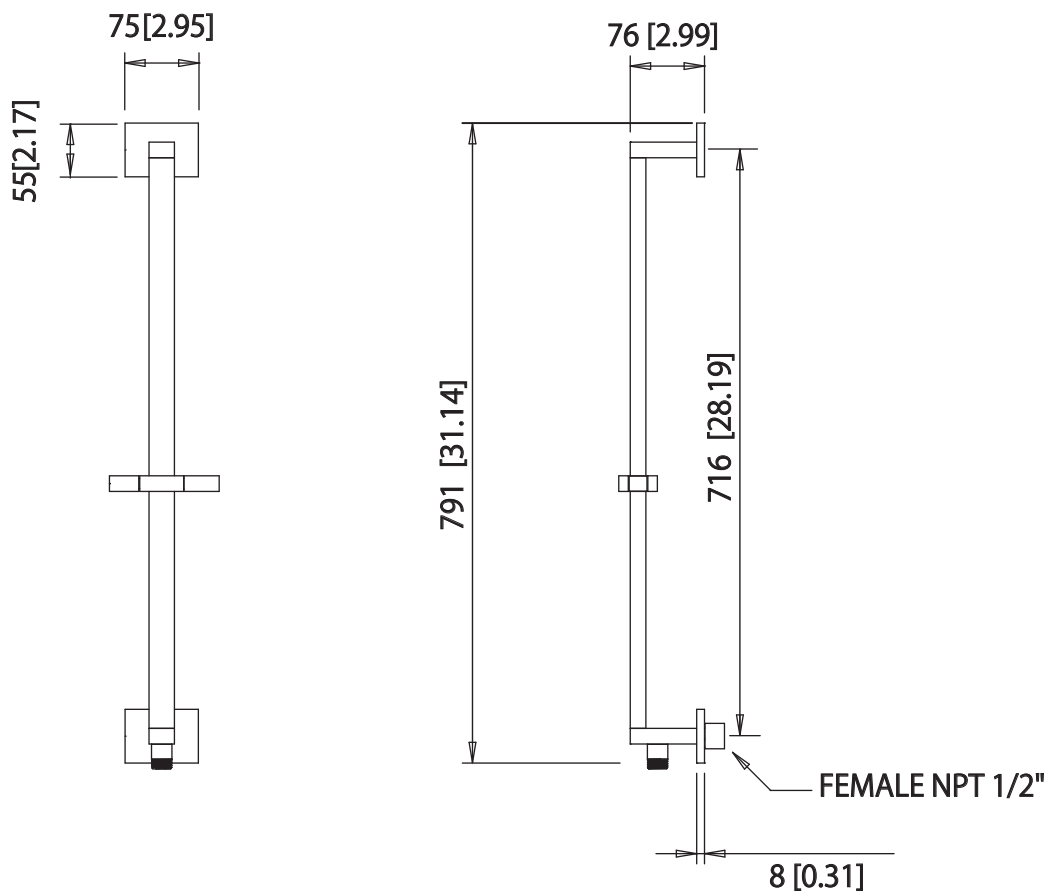

## SP.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

