


## 160.4801 | Four Output 3/4" Thermostatic Valve & Trim

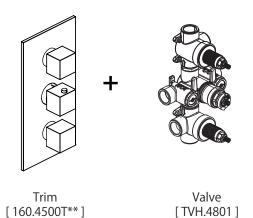

#### SPECIFICATIONS:


- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate 8 GPM @ 60 PSI
- Extension Available TVH.4401E\*\*


#### **STANDARDS:**


• ASME A112.18.1 / CSA B125.1

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

#### **Technical Diagram**

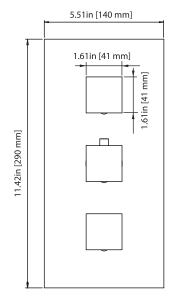

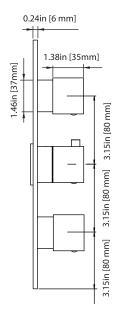

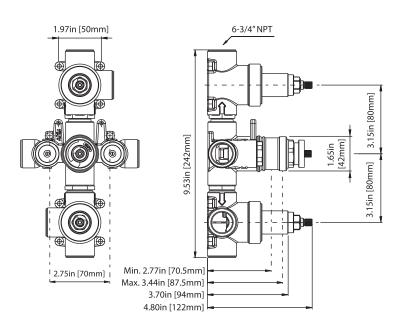



## Universal Fixtures ™

## TVH.4801 | Four Output 3/4" Thermostatic Valve



#### **OUTPUT OPERATION**

#### **TOP HANDLE**

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output 1 Activated
- Position 2 Output 2 Activated

#### **BOTTOM HANDLE**

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output 3 Activated
- Position 2 Output 4 Activated


#### **PORT OPERATION**

Ports that can be operated simultaneously:

- Output 1 & 3 can be operated simultaneously
- Output 1 & 4 can be operated simultaneously
- Output 2 & 3 can be operated simultaneously
- Output 2 & 4 can be operated simultaneously

Ports that cannot be operated simultaneously:

- Output 1 & 2 cannot be operated simultaneously
- Output 3 & 4 cannot be operated simultaneously

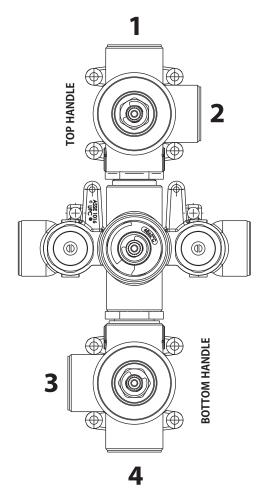




# **Universal Fixtures** ™

## TVH.4801 | Four Output 3/4" Thermostatic Valve






#### **SPECIFICATIONS:**

- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate 8.0 GPM @ 60 PSI
- Extension Available TVH.4401E\*\*

#### **STANDARDS:**

• ASME A112.18.1 / CSA B125.1



#### **Technical Diagram**

