


## 160.7300 | Two Output Shower W/ Rain Head , Hand Held & Slide Bar

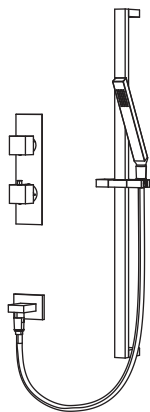

### COMPONENTS

- HS1011SA - 16" Shower Arm
- HSB.10S - 10" Shower Head
- 160.4000VT - Shower Trim
- TVH.2717F - Shower Valve
- HS1006H - Hand Held
- 160.550S - Wall Elbow
- SP.150EM - 1.5m Hose
- 100.601003A - Slide Bar

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

### STANDARDS:


- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.


**HS1011SA | Square Shower Arm - 400mm - 16"**

**SPECIFICATIONS:**

- Solid Brass Shower Arm
- With Sliding Flange

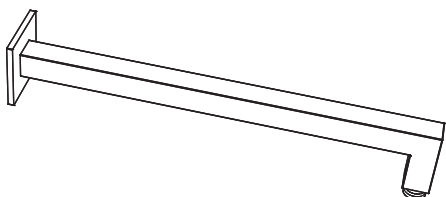

**Technical Diagram**

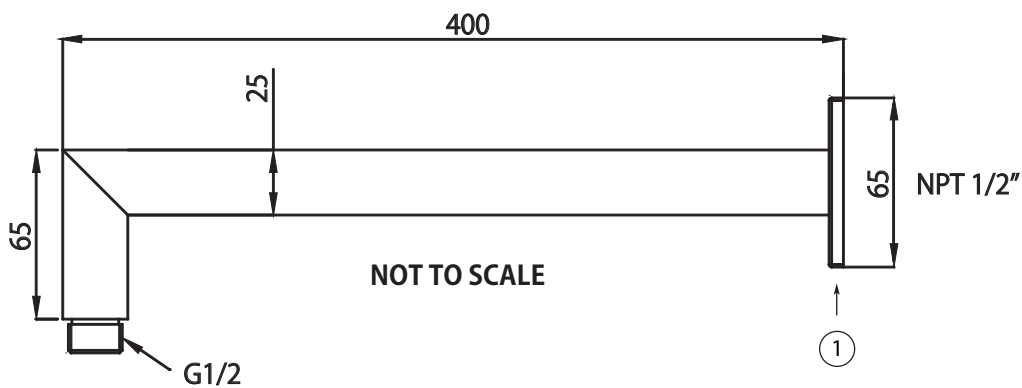


## HSB.10S | 10" Brass Shower Head




### SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate
- 256 Nozzles - [ 16 x 16 ]

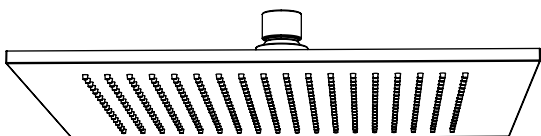


### Technical Diagram

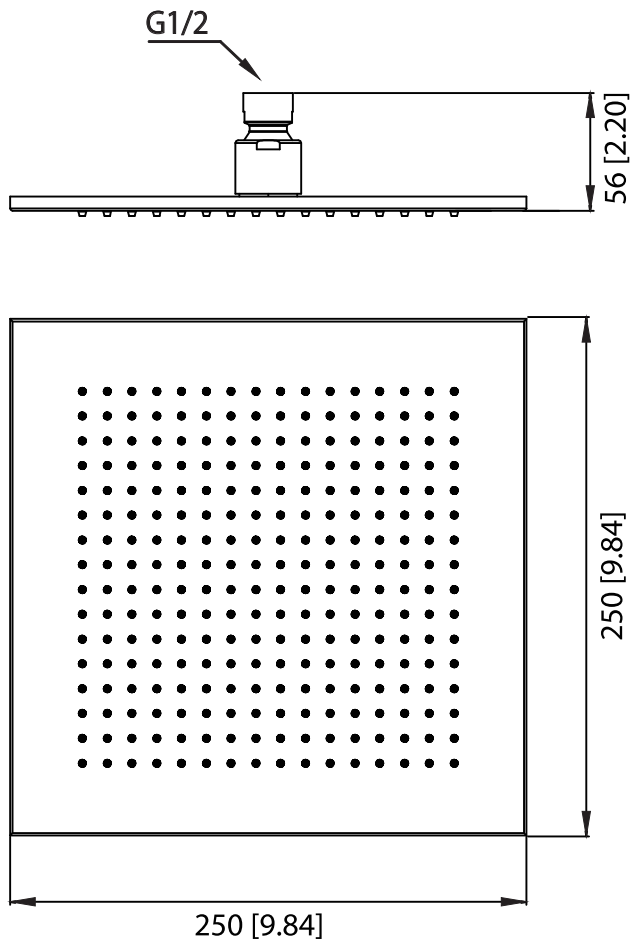


## 160.4000VT | Thermostatic Shower Trim

### SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Turn bottom handle to control temperature.
- Turn top handle to control volume.




### Technical Diagram

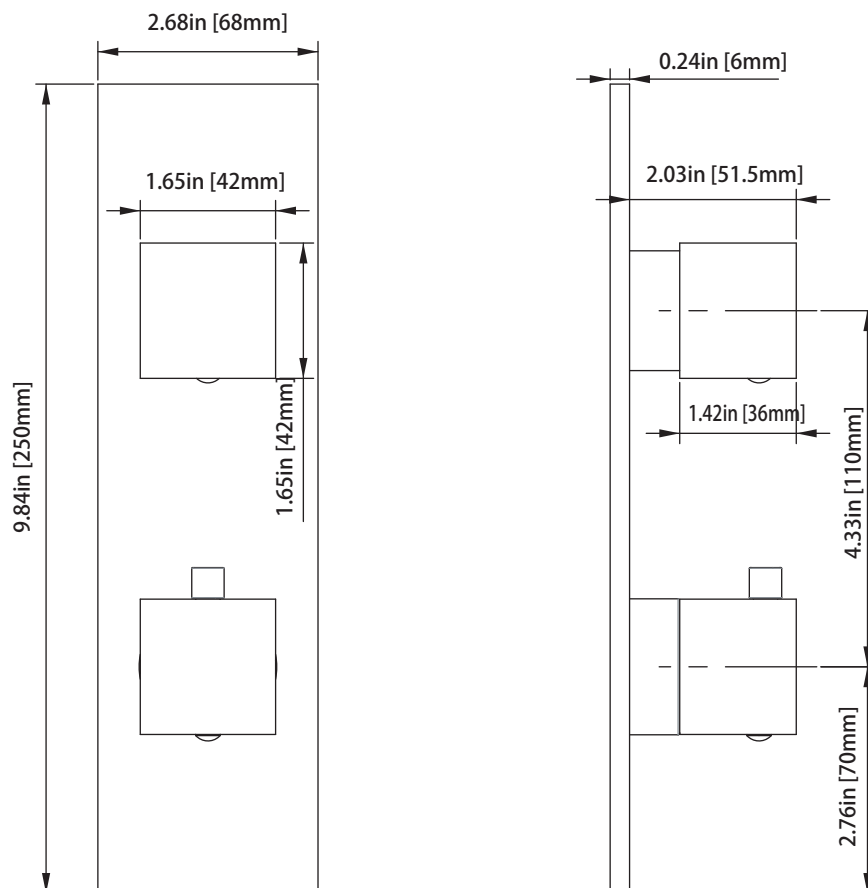

# TVH.2717F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control

Page 1 of 2

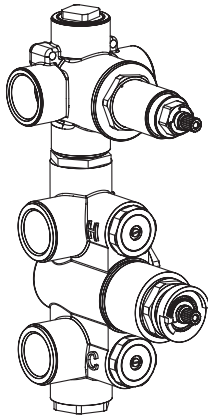

## SPECIFICATIONS:


- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 8.0 GPM @ 60 PSI
- Extension Available - TVH.4101E\*\*

## STANDARDS:

- ASME A112.18.1 / CSA B125.1

**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

## Technical Diagram

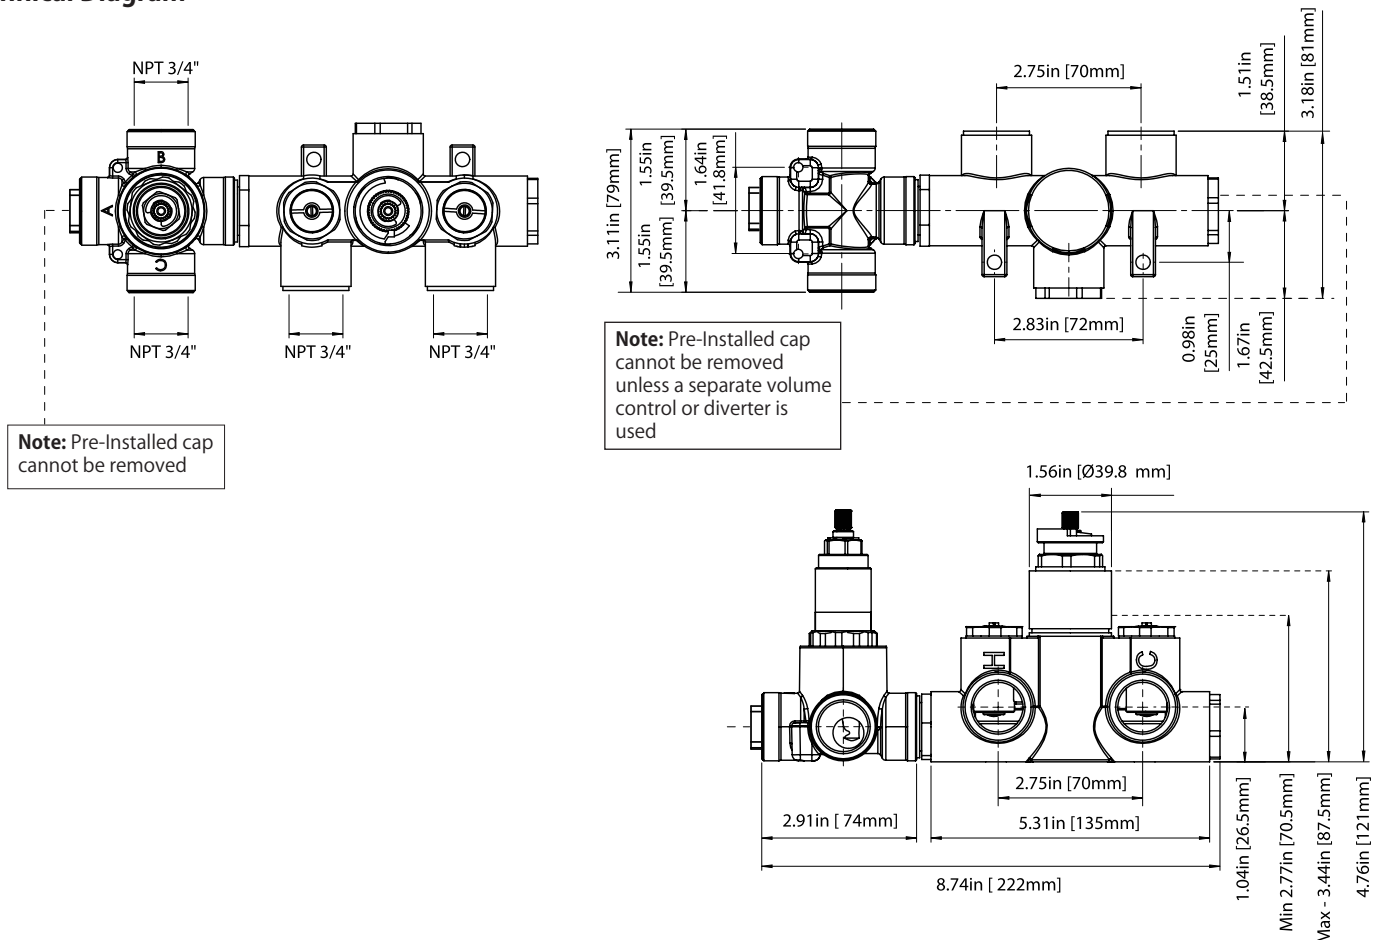

**TVH.2717F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control**

Page 2 of 2




**TWO OUPUT - CAL-GREEN - NO SHARED PORT OPERATION**

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

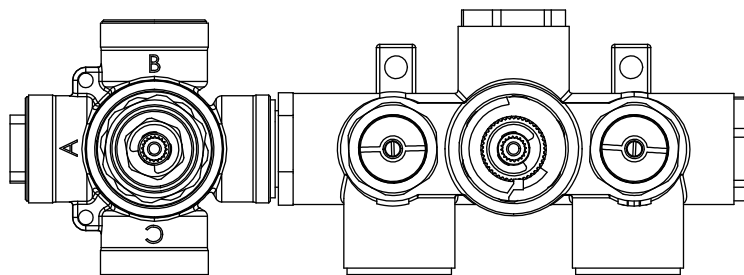

**TWO OUPUT - SHARED PORT OPERATION**

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated


## HS1006H | Solid Brass Hand Shower

### SPECIFICATIONS:

- Solid Brass Construction
- 1.8 GPM Flow Rate
- With back flow prevention check valve

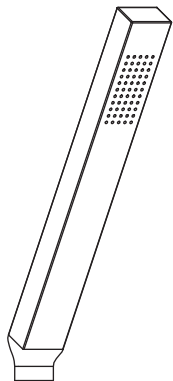

### Technical Diagram

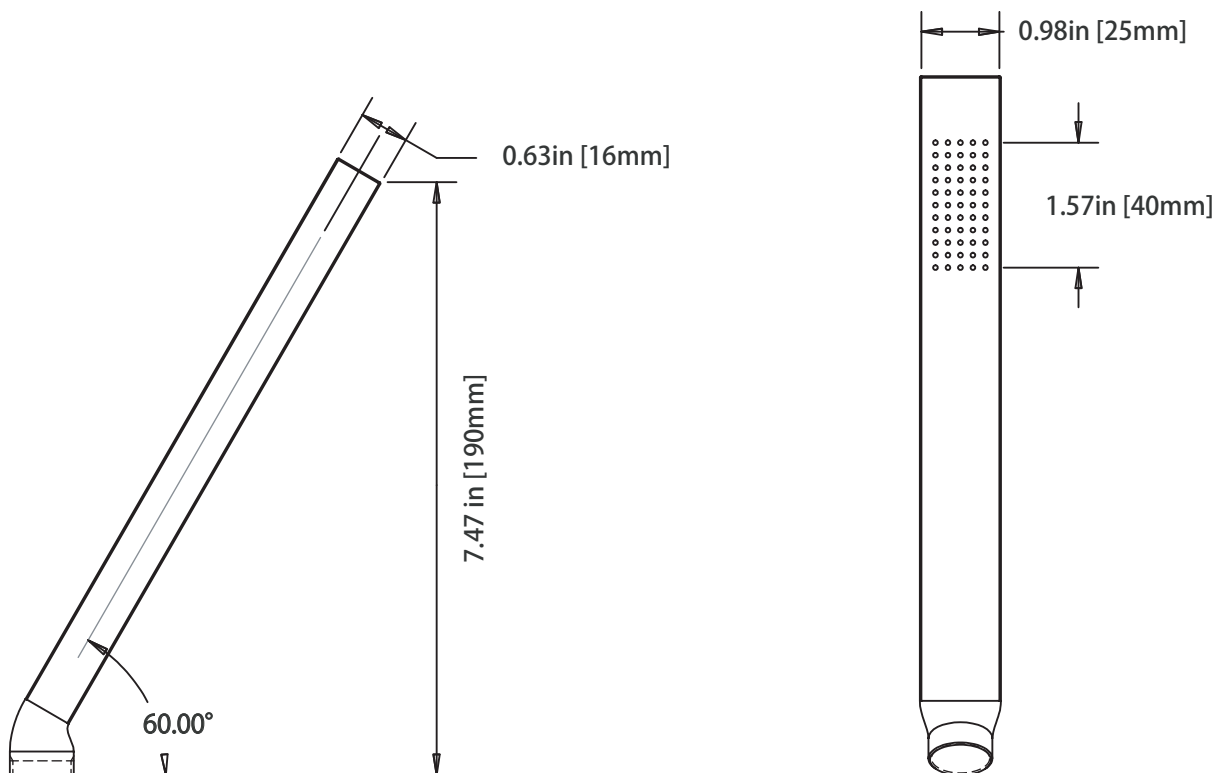


160.5505 | Wall Elbow



**SPECIFICATIONS:**

- Solid Brass construction
- 1/2" female connection with adjustable slide on installation
- Includes check valve with back-flow prevention

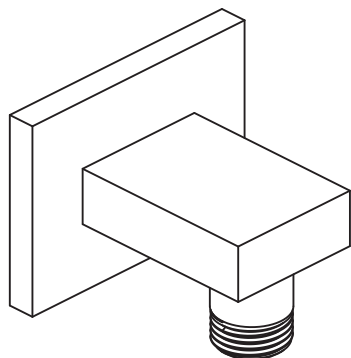

**Technical Diagram**






## SP.150EM | Easy Maneuver Hose




### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

## Technical Diagram

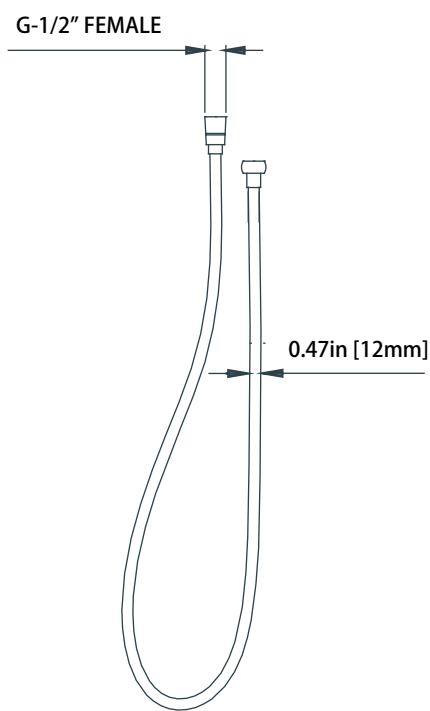

## 160.601003A | Slide Bar



### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation

### Technical Diagram

