


SPECIFICATIONS:

- Solid Brass construction - includes valve (WLM.1900)
- Three Hole Installation
- 8.0 GPM Flow Rate @ 60 PSI
- Extension Available - 230.1950E**

- ASME A112.18.1 / CSA B125.1, NSF-61

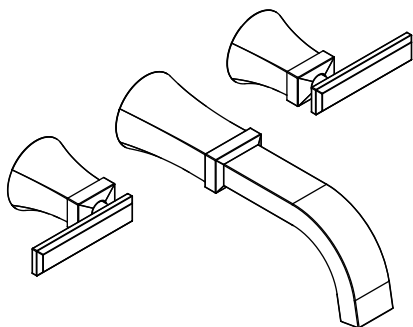

FLOW
Efficient