


## CU.2300LE | Wall Mount Touchless Facuet With Electronic Sensor Box Left Facing Curvature

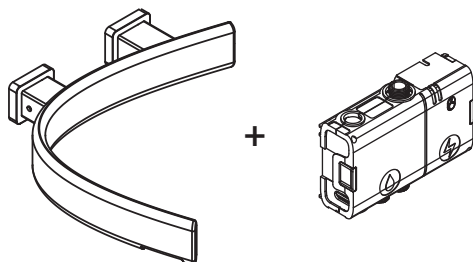

### SPECIFICATIONS:

- Solid Brass construction
- Wall mount Installation
- 1.2 GPM Flow Rate @ 60 PSI
- Installs via adjustable 1/2" NPT connection
- Sensor box allows touchless operation
- Connects via standard half inch operation

### STANDARDS:

- ASME A112.18.1 / CSA B125.1, NSF-61

### Technical Diagram

